


Builder's Level of the X-Series

Easy to handle and very robust automatic
builder's levels



Schematic view (original size) of a
levelling staff from a distance of 20 m

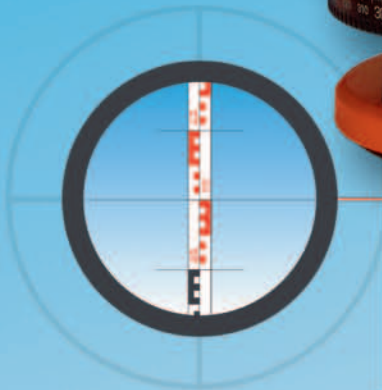

®

**Precise surveying
and measuring**

Automatic Builder's Level

X20

X24

X28

X32



Technical Data

Optics	upright	upright	upright	upright
Magnification	20 x	24 x	28 x	32 x
Lens diameter	30 mm	36 mm	36 mm	36 mm
Shortest target distance	0.6 m	0.6 m	0.6 m	0.6 m
Multiplication factor	100	100	100	100
Compensator operating range	± 15'	± 15'	± 15'	± 15'
Adjusting accuracy	± 0.5"	± 0.5"	± 0.4"	± 0.3"
Circular graduation	400 gon	400 gon	400 gon	400 gon
Sensitivity of circular bubble	8'/2 mm	8'/2 mm	8'/2 mm	8'/2 mm
Standard deviation for 1 km double-run levelling	± 2.5 mm	± 2.0 mm	± 1.5 mm	± 1.0 mm
Weight	1.7 kg	1.7 kg	1.7 kg	1.7 kg
Connecting thread	5/8"	5/8"	5/8"	5/8"
Ref.-No.	460 770-613	460 745-613	460 787-613	460792-613

Also available as a kit



The levels X20 and X24 are also available as a kit, including a 5 m telescopic levelling staff and an aluminium tripod.

Kit X20 Ref.-No. 462 205

Including Builder's Level X20.....460 770-613
Telescopic levelling staff.....345 115-613
Aluminium tripod.....200 215-613

Kit X24 Ref.-No. 462 245

Including Builder's Level X24.....460 745-613
Telescopic levelling staff.....345 115-613
Aluminium tripod.....200 215-613



®

**Precise surveying
and measuring**

Nedo GmbH & Co. KG

Hochgerichtstrasse 39-43 ■ D-72280 Dornstetten
Germany

Phone: +49/7443/2401-0 ■ Fax: +49/7443/2401-45

www.nedo.com ■ info@nedo.com

Your Nedo Dealer